



HONEYCOMB SPECIFICATION

Composition	100% POLYESTER
Color Fastness	>5-6
Weight	125g /m ²
Shrink Rate	<0.5%
Test Standard	GB/T3921997 GB/T2912, 1-199
Environment	Normal


Semi Opaque		Blackout	
UV Protection	> 96%	UV Protection	> 98%
R	2.95	R	4.33
Sun shading rate	0.45	Sun shading rate	0.21
Sound absorption	0.32	Sound absorption	0.45

TOP DOWN OR BOTTOM UP

Minimum Width: 150mm
Maximum Width: 1400mm
Maximum Drop: 3000mm

FLOATING OR DAY & NIGHT

Minimum Width: 150mm
Maximum Width: 1200mm
Maximum Drop: 3000mm

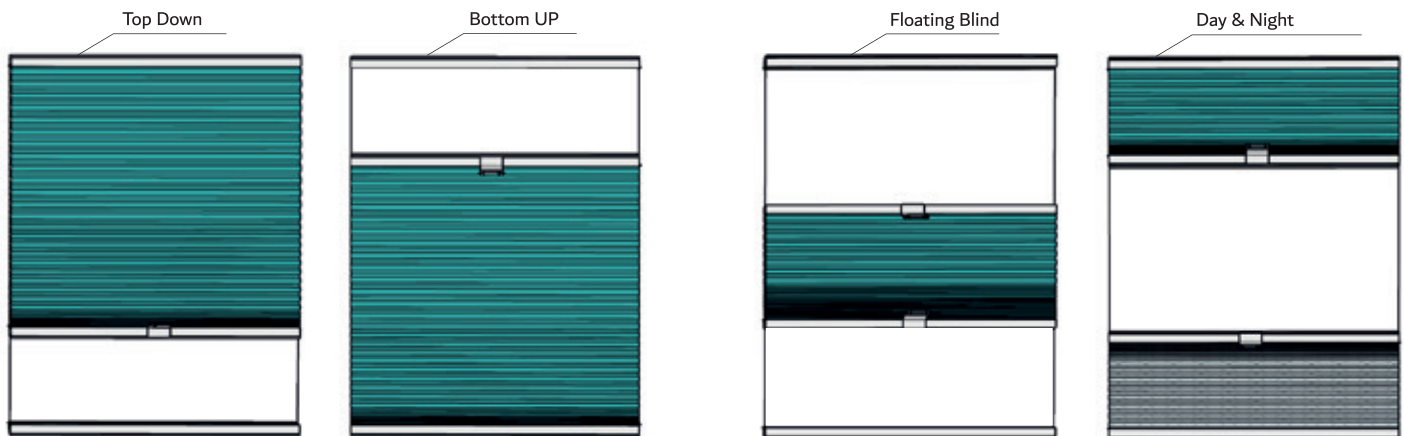


PERFECT FIT

Minimum Width: 130mm Maximum Drop: for widths <600mm = 1800mm
Maximum Width: 1200mm Maximum Drop: for widths >600mm = 3000mm

ROOF LANTERNS


Minimum Width: 1200mm
Maximum Drop: 3000mm

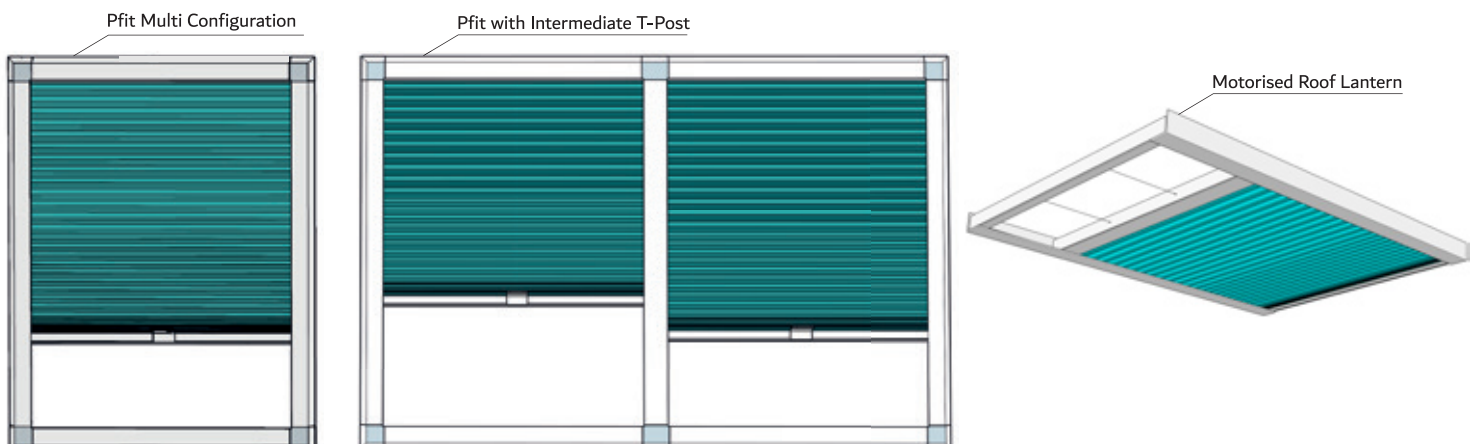

FABRIC COLOUR SELECTOR



Darby White



Darby Cream




Darby Willow



Darby Linen



Darby Otter



Darby Pistachio



Darby Strawberry



Darby Teal



Darby Plum



Darby Charcoal




Zaria Linen



Zaria Apple



Zaria Hollyhock



Zaria Danube



Liana Ivory




Liana Cream



Liana Silver



Liana Berry



Thalia White



Thalia Grey

Disclaimer: Colours shown are as close as possible to actual fabric colours. Please note, due to limitations of the printing process, photographic and printed images may not represent the true colour. Always confirm your colour choice with a swatch sample.

MOTOR SPECIFICATIONS




KEY FEATURES

- ③ Low power consumption design, compatible with 7.4V battery box and solar panel.
- ③ Dot move and continuous move for option, free to change the motor run direction.
- ③ Can set multiple limit positions(UP/DOWN/Middle limit positions).
- ③ Position sensor open circuit and short circuit protection function, stop on block function.
- ③ Can detect the circles of motor rotation, high precision.
- ③ Automatic correction function for the displacement caused by braking.
- ③ Power failure can save position and function parameters.

PARAMETERS

Model No.	AM24B-06/34-ES-I-EB
Input Voltage	7.4V
Rated Torque	0.6Nm
Rated RPM	34 RPM
Rated Current	1.2A
Stall Current	2.5A
IP Class	IP44
Control Mode	RF remote control /APP
Working Temperature	-10 ~ +60°C
Receiving Frequency	433.92MHz/2.4G
Modulation	ASK/ Bluetooth
Receiving Distance	≥ 80m

MOTOR OVERVIEW

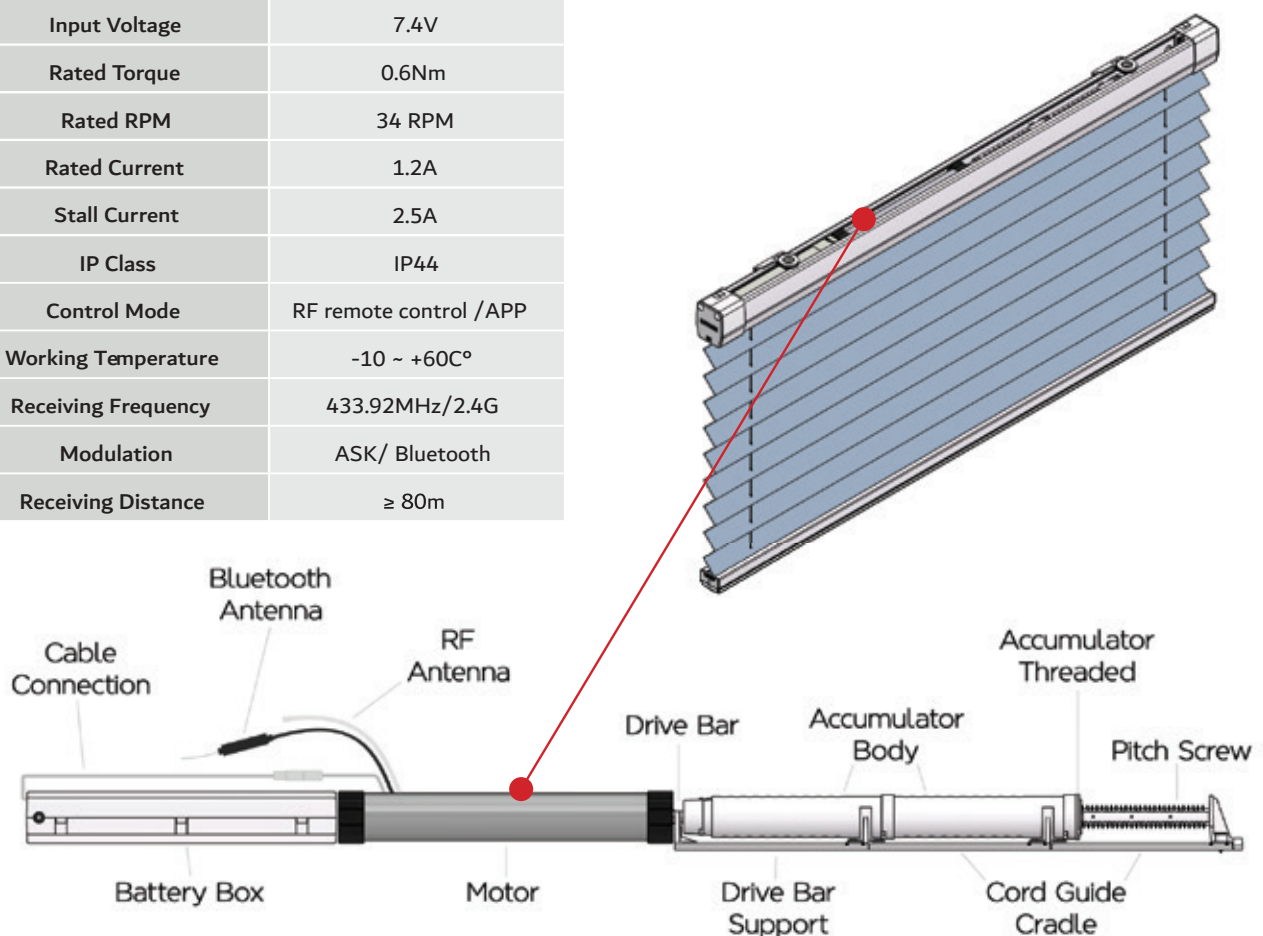

Blindtex **UAE**
Area M6-10
SAIF Zone Sharjah – United Arab Emirates
Tel: +971 65578051
Email: sales@blindtex.com

Blindtex **UK**
4 Wigan Road
Bolton
Lancashire
BL3 5PZ
Tel: 0161 818 9915
Email: sales@blindtex.co.uk

www.blindtex.com



A BRAND OF **INNOV8** PRODUCTS